



MICC 1083C CABLE RANGE




UL 1083C Approved
2 Hour Rated, Mineral Insulated
Copper Sheathed Wiring Cable

Life safety and firefighting equipment often relies on the integrity of the essential wiring system to enable evacuation & firefighting operations. MICC Group Copper Wiring Cable is a UL Classified 2-hour fire resistive cable tested to the UL 2196 fire test standard.

Copper MI (Magnesium Oxide) insulated wiring cables have been in existence since 1936, and their unique qualities, characteristics and unbeatable performance have remained the gold standard for fire rated wiring, as no conduits or concrete protection is required. Studies have shown copper MI insulated wiring cables to be the only fire rated cables that do not produce toxic smoke or gases under fire conditions as there are no organic materials in the cables construction.

Mineral Cable Construction

Standards & Approvals

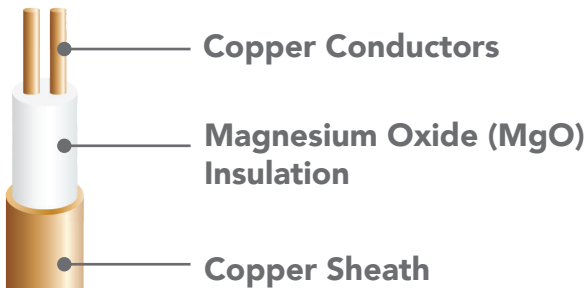

- UL2196 (Standard for Tests for Fire Resistive Cables)
- UL 514B (Conduit, Tubing, and Cable Fittings - Edition 6 - Revision Date 2014/11/21)
- C22.2 NO. 18.3-12 (Conduit, Tubing and Cable Fittings Edition 2 - Revision Date 2014/11/21)
- UL 486A-486B (Wire Connectors Edition 3 - Issue Date 2018/04/27)
- CSA C22.2 NO. 65-18 (Wire Connectors Edition 6 - Issue Date 2018/04/27)
- UL504 (Outline of Investigation for Mineral-Insulated, Metal- Sheathed Cable)
- ISO9001
- ISO14001

Specifications

Wiring Cable Catalog Number

Sheath material	Copper
Insulation	Magnesium Oxide (MgO)
Conductor type	Copper
Conductor size	16 AWG - 500 kcmil
Conductor(s)	1, 2, 3, 4, 7
Insulation voltage rating	600 V

Position	1	2	3	4	5
Code	CC	1	H	10	W
Position	Characteristics		Code options		
1	Sheath material		CC = Copper		
2	Number of conductor(s)		1 = 1 Conductor		
3	Insulation voltage rating		H = 600 V		
4	Conductor size		10 = Conductor size (AWG)		
5	Product category		W = Wiring		

Cable Temperature Rating

Continuous exposure temperature	482 °F (250 °C)
Maximum exposure temperature	1850 °F (1010 °C)

MICC cable termination kits are provided by MICC to complement the cable range approved by UL. A complete termination consists of two basic units. They are the seal and the gland. The seal separates and insulates the conductors from each other and from the sheath yet also seals the cable insulation. The gland secures the cable into the apparatus, provides mechanical protection for the seal and provides earth continuity when required.


The brass pot seal is screwed on to the end of the cable and filled with MICC manufactured sealing putty before a disc and sleeving completes the end seal termination.

If a brass compression gland is employed this must be installed on the cable before the pot seal is fitted.

Termination By Cable Type

See the MICC table below for termination by cable type.

MICC Cable			MICC Seal Kit				Kit Contents			
MICC PN	OD (Nom. inch)	Cond. OD (Min. inch)	Qty	Cable Config	Kit PN	Gland Thread Size (NPSM)	Assembled Gland Qty	Brass Seal Pot Qty	Cap with Insulating Sleeving Qty	TRMX Putty Qty
Single Conductor										
CC1H16W	0.215	0.047	1	1C 16	MI01016-050	1/2"	2	2	2	1
CC1H14W	0.230	0.059	1	1C 14	MI01014-050	1/2"	2	2	2	1
CC1H12W	0.246	0.075	1	1C 12	MI01012-050	1/2"	2	2	2	1
CC1H10W	0.277	0.094	1	1C 10	MI01010-050	1/2"	2	2	2	1
CC1H8W	0.298	0.119	1	1C 8	MI01008-050	1/2"	2	2	2	1
CC1H6W	0.340	0.150	1	1C 6	MI01006-050	1/2"	2	2	2	1
CC1H4W	0.402	0.189	1	1C 4	MI01004-050	1/2"	2	2	2	1
CC1H3W	0.449	0.221	1	1C 3	MI01003-075	3/4"	2	2	2	2
CC1H2W	0.449	0.248	1	1C 2	MI01002-075	3/4"	2	2	2	2
CC1H1W	0.496	0.278	1	1C 1	MI01001-075	3/4"	2	2	2	2
CC1H1/0W	0.512	0.313	1	1C 1/0	MI011X0-075	3/4"	2	2	2	2
CC1H2/0W	0.580	0.351	1	1C 2/0	MI012X0-075	3/4"	2	2	2	2
CC1H3/0W	0.621	0.402	1	1C 3/0	MI013X0-075	3/4"	2	2	2	2
CC1H4/0W	0.684	0.443	1	1C 4/0	MI014X0-100	1"	2	2	2	2
CC1H250W	0.746	0.480	1	1C 250	MI01250-125	1-1/4"	2	2	2	3
CC1H350W	0.834	0.569	1	1C 350	MI01350-125	1-1/4"	2	2	2	3
CC1H500W	1.000	0.679	1	1C 500	MI01500-125	1-1/4"	2	2	2	3
Two Conductors										
CC2H16W	0.340	0.047	1	2C 16	MI02016-050	1/2"	2	2	2	1
CC2H14W	0.371	0.059	1	2C 14	MI02014-050	1/2"	2	2	2	1
CC2H12W	0.402	0.075	1	2C 12	MI02012-050	1/2"	2	2	2	1
CC2H10W	0.449	0.094	1	2C 10	MI02010-075	3/4"	2	2	2	2
CC2H8W	0.512	0.119	1	2C 8	MI02008-075	3/4"	2	2	2	2
CC2H6W	0.590	0.150	1	2C 6	MI02006-075	3/4"	2	2	2	2
CC2H4W	0.684	0.189	1	2C 4	MI02004-100	1"	2	2	2	2
CC2H3W	0.768	0.221	1	2C 3	MI02003-125	1-1/4"	2	2	2	3
CC2H2W	0.865	0.248	1	2C 2	MI02002-125	1-1/4"	2	2	2	3
CC2H1W	0.975	0.278	1	2C 1	MI02001-125	1-1/4"	2	2	2	3
Three Conductors										
CC3H16W	0.355	0.047	1	3C 16	MI03016-050	1/2"	2	2	2	1
CC3H14W	0.387	0.059	1	3C 14	MI03014-050	1/2"	2	2	2	1
CC3H12W	0.480	0.075	1	3C 12	MI03012-075	3/4"	2	2	2	2
CC3H10W	0.480	0.094	1	3C 10	MI03010-075	3/4"	2	2	2	2
CC3H8W	0.590	0.119	1	3C 8	MI03008-075	3/4"	2	2	2	2
CC3H6W	0.621	0.150	1	3C 6	MI03006-075	3/4"	2	2	2	2
CC3H4W	0.746	0.189	1	3C 4	MI03004-125	1-1/4"	2	2	2	3
CC3H3W	0.834	0.221	1	3C 3	MI03003-125	1-1/4"	2	2	2	3
Four Conductors										
CC4H16W	0.387	0.047	1	4C 16	MI04016-050	1/2"	2	2	2	2
CC4H14W	0.465	0.059	1	4C 14	MI04014-075	3/4"	2	2	2	2
CC4H12W	0.465	0.075	1	4C 12	MI04012-075	3/4"	2	2	2	2
CC4H10W	0.590	0.094	1	4C 10	MI04010-075	3/4"	2	2	2	2
CC4H8W	0.590	0.119	1	4C 8	MI04008-075	3/4"	2	2	2	2
CC4H6W	0.730	0.150	1	4C 6	MI04006-125	1-1/4"	2	2	2	3
Seven Conductors										
CC7H16W	0.449	0.047	1	7C 16	MI07016-075	3/4"	2	2	2	2
CC7H14W	0.496	0.059	1	7C 14	MI07014-075	3/4"	2	2	2	2
CC7H12W	0.543	0.075	1	7C 12	MI07012-075	3/4"	2	2	2	2
CC7H10W	0.621	0.094	1	7C 10	MI07010-100	1"	2	2	2	2
CC7H8W	0.710	0.119	1	7C 8	MI07008-125	1-1/4"	2	2	2	3

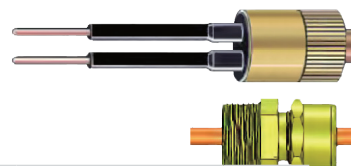

600 V Wiring Cable Type

See the MICC table below for Wiring Cable type.

Number of Conductor(s)	AWG Conductor Size	MICC Cable REF.	Conductor Diameter			Cable OD			COND. Resistance / 1000 FT.	Weight / 1000 FT
			MAX. Inch	NOM. Inch	MIN. Inch	MAX. Inch	NOM. Inch	MIN. Inch	MAX. Ω	NOM. LBS.
1	10	CC1H10W	0.113	0.102	0.094	0.279	0.277	0.275	1.080	141.4
1	8	CC1H8W	0.141	0.128	0.119	0.300	0.298	0.296	0.680	169.1
1	6	CC1H6W	0.177	0.162	0.150	0.342	0.340	0.338	0.427	222.1
1	4	CC1H4W	0.225	0.204	0.189	0.404	0.402	0.400	0.269	307.3
1	3	CC1H3W	0.239	0.229	0.221	0.451	0.449	0.447	0.210	377.8
1	2	CC1H2W	0.270	0.258	0.248	0.451	0.449	0.447	0.169	412.5
1	1	CC1H1W	0.299	0.289	0.278	0.498	0.496	0.494	0.130	501.4
1	1/0	CC1H1/0W	0.340	0.325	0.313	0.514	0.512	0.510	0.106	567.4
1	2/0	CC1H2/0W	0.383	0.365	0.351	0.582	0.580	0.578	0.084	715.1
1	3/0	CC1H3/0W	0.426	0.410	0.402	0.623	0.621	0.619	0.067	853.2
1	4/0	CC1H4/0W	0.481	0.460	0.443	0.686	0.684	0.682	0.052	1050.7
1	250MCM	CC1H250W	0.528	0.500	0.480	0.748	0.746	0.744	0.044	1239.1
1	350MCM	CC1H350W	0.618	0.590	0.569	0.836	0.834	0.832	0.032	1611.7
1	500MCM	CC1H500W	0.743	0.707	0.679	1.002	1.000	0.998	0.022	2269.3
2	10	CC2H10W	0.113	0.102	0.094	0.451	0.449	0.447	1.080	319.9
2	8	CC2H8W	0.141	0.128	0.119	0.514	0.512	0.510	0.680	415.8
2	6	CC2H6W	0.177	0.162	0.150	0.592	0.590	0.588	0.427	570.4
2	4	CC2H4W	0.225	0.204	0.189	0.686	0.684	0.682	0.269	795.6
2	3	CC2H3W	0.239	0.229	0.221	0.770	0.768	0.766	0.210	1001.8
2	2	CC2H2W	0.270	0.258	0.258	0.867	0.865	0.863	0.169	1265.5
2	1	CC2H1W	0.299	0.289	0.278	0.977	0.975	0.973	0.130	1591.9
3	10	CC3H10W	0.113	0.102	0.094	0.482	0.480	0.478	1.080	386.1
3	8	CC3H8W	0.141	0.128	0.119	0.592	0.590	0.588	0.680	558.9
3	6	CC3H6W	0.177	0.162	0.150	0.623	0.621	0.619	0.427	693.7
3	4	CC3H4W	0.225	0.204	0.189	0.748	0.746	0.744	0.269	1024.6
3	3	CC3H3W	0.239	0.229	0.221	0.836	0.834	0.832	0.210	1269.1
4	10	CC4H10W	0.113	0.102	0.094	0.592	0.590	0.588	1.080	541.0
4	8	CC4H8W	0.141	0.128	0.119	0.592	0.590	0.588	0.588	617.9
4	6	CC4H6W	0.177	0.162	0.150	0.732	0.730	0.728	0.427	940.9
7	10	CC7H10W	0.113	0.102	0.094	0.623	0.621	0.619	1.080	688.7
7	8	CC7H8W	0.141	0.128	0.119	0.712	0.710	0.708	0.680	960.2



MICC EZ Termination Kit



The MICC EZ termination kit is a range of kits used to field-terminate #6 AWG and larger single conductor copper sheathed mineral insulated (MI) wiring cable in non-hazardous areas. It is size-for-size, allowing the MI solid conductor to be joined to an equal size flexible tail with a compression connector. The sized-up EZ termination kit allows the MI solid conductor to be joined to a larger size flexible tail.



Kit Contents

The MICC EZ termination kit contains sufficient material to terminate both ends of a cable.

Table 1

The BOM of size-for-size EZ termination kit for stranded copper conductor to MI solid conductor

MICC Cable REF.	Conductor Size (AWG/kcmil)	Brass Gland		Stranded Wire With 90°C Insulated Sleeve*		Copper Crimp Connector	Self-Amalgamating Tape	Heat-Shrinkable Tubing	Emery Paper
		Size (NPSM)	Qty	Size (AWG/kcmil)	Qty				
CC1H6W	6	1/2"	2	6	2	2	1	2	2
CC1H4W	4	1/2"	2	4	2	2	1	2	2
CC1H3W	3	3/4"	2	3	2	2	1	2	2
CC1H2W	2	3/4"	2	2	2	2	1	2	2
CC1H1W	1	3/4"	2	1	2	2	1	2	2
CC1H1/0W	1/0	3/4"	2	1/0	2	2	1	2	2
CC1H2/0W	2/0	3/4"	2	2/0	2	2	1	2	2
CC1H3/0W	3/0	3/4"	2	3/0	2	2	1	2	2
CC1H4/0W	4/0	1"	2	4/0	2	2	1	2	2
CC1H250W	250	1-1/4"	2	250	2	2	1	2	2
CC1H350W	350	1-1/4"	2	350	2	2	1	2	2
CC1H500W	500	1-1/4"	2	500	2	2	1	2	2

Table 2

The BOM of sized-up EZ termination kit for stranded copper conductor to MI solid conductor length is provided by field Installation Engineer.

MICC Cable REF.	Conductor Size (AWG/kcmil)	Brass Gland		Stranded Wire With 90°C Insulated Sleeve*		Copper Crimp Connector	Self-Amalgamating Tape	Heat-Shrinkable Tubing	Emery Paper
		Size (NPSM)	Qty	Size (AWG/kcmil)	Qty				
CC1H6W	6	1/2"	2	2	2	2	1	2	2
CC1H4W	4	1/2"	2	1/0	2	2	1	2	2
CC1H3W	3	3/4"	2	2/0	2	2	1	2	2
CC1H2W	2	3/4"	2	3/0	2	2	1	2	2
CC1H1W	1	3/4"	2	4/0	2	2	1	2	2
CC1H1/0W	1/0	3/4"	2	4/0	2	2	1	2	2
CC1H2/0W	2/0	3/4"	2	250	2	2	1	2	2
CC1H3/0W	3/0	3/4"	2	350	2	2	1	2	2
CC1H4/0W	4/0	1"	2	500	2	2	1	2	2
CC1H250W	250	1-1/4"	2	500/600	2	2	1	2	2
CC1H350W	350	1-1/4"	2	500/750	2	2	1	2	2
CC1H500W	500	1-1/4"	2	750	2	2	1	2	2

Note: * 90°C, 600 V insulated stranded copper conductor wire (RW90, THHN or equivalent) of appropriate length is provided by field Installation Engineer.



Tools

We can supply the full range of tools to satisfy your MI Cable project requirements. Below are the tools that are most commonly used.



ZSUS - Stripper (Small)

Used to strip the sheath of the copper sheathed MI Cable. Suitable for cables below 0.354" (9 mm) diameter.

ZSU - Stripper (Large)

Used to strip the sheath of the copper sheathed MI Cable. Suitable for cables over 0.354" (9 mm) diameter.

ZSUB - Spare Blades (sold in packs of five).


The tools carried in the average electrician's kit are usually adequate to carry out effective terminations on MI cables with the exception of crimping the pot closure. However, for efficiency and convenience, we offer the following range of purpose designed tools.



ZPM - Pot Wrench

This tool ensures quick and accurate screwing on of the brass pot and is used in conjunction with the appropriate RGM cable gland. Four sizes are available to cover the range of seals.

To order use reference ZPM + Pot size.



ZDC - Crimping Tool

The MICC Crimp is a robust long life tool that applies a three point crimping action to the brass pot seal, securely locking the cap into position. It is available for 1/2" and 3/4" seal sizes.

To order use Ref. ZDC + size of seal.



ZBS Family of Products

Designed to assist in the preliminary dressing of cables prior to fixing, the small tool is suitable for cables up to approximately 1/2" mm diameter.

(For larger cables, initial dressing can be carried out with the aid of MICC Benders).

To order use Ref. ZBS3 or ZBS5.



ZBLA - Bending Levers

MICC Cable can normally be bent by hand, but to assist in the symmetry of multiple bends on large installations or where the heaviest cables are involved, bending levers can save time. Two sizes are available.

For cable diameters between 0.629" (16 mm) and 1" (25.4 mm) order Ref. ZBLB.

For cable diameters between 0.394" (10 mm) and 0.629" (16 mm) order Ref. ZBLA



Who Are We

- MICC Group manufactures the full range of Mineral Insulated cable products
- We have the largest manufacturing facility of its type in the world, which allows us to manufacture every type of MI Cable
- We have the history and experience of BICC
- Strong R&D and engineering teams
- Global manufacturing network

Notable References

We have considerable experience working on MI Fire Survival Wiring as referenced below.

- UK Houses of Parliament
- Shanghai Tower
- Kuwait University
- Delhi Metro
- Sydney Metro
- Dubai Airport
- Royal Papworth Hospital UK
- Hong Kong Metro
- Every Nuclear Power Plant in the UK



TEC
INTERNATIONAL

TEC International LLC

26695 Eckel Road Suite B
Perrysburg, Ohio 43551, USA
sales@tecwiring.com
www.tecwiring.com
1-419-442-0941



MICC BRAND FIRE WIRING

MMC Corp

26695 Eckel Road Suite B
Perrysburg, Ohio 43551, USA
sales@micccorp.com
www.micccorp.com
1-567-331-0101

MICC UK

21 Sedling Road, Washington
Tyne And Wear, NE38 9BZ, UK
sales@miccltd.com
www.miccltd.com
+44-191-416-7777

Disclaimer: No freedom from infringement of any patent owned by MICC or others is to be inferred.

Subject to changes and errors. The information given in this catalog only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract. Because use conditions and applicable laws may differ from one location to another and may change with time, the Customer is responsible for determining whether products and the information in this document are appropriate for the Customer's use and for ensuring that the Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. The product shown in this literature may not be available for sale and/or available in all geographies where MICC is represented. The claims made may not have been approved for use in all countries. MICC assumes no obligation or liability for the information in this document. References to "MICC" or the "Company" mean the MICC legal entity selling the products to Customer unless otherwise expressly noted. No warranties are given. All implied warranties of merchantability or fitness for a particular purpose are expressly excluded.

The data and illustrations are not binding. We reserve the right to modify the contents of this document on the basis of technical development of the products, without prior notice.

©Copyright 2021 MICC. All rights reserved.

